


# L6tdeep+grid+25pf+Pi

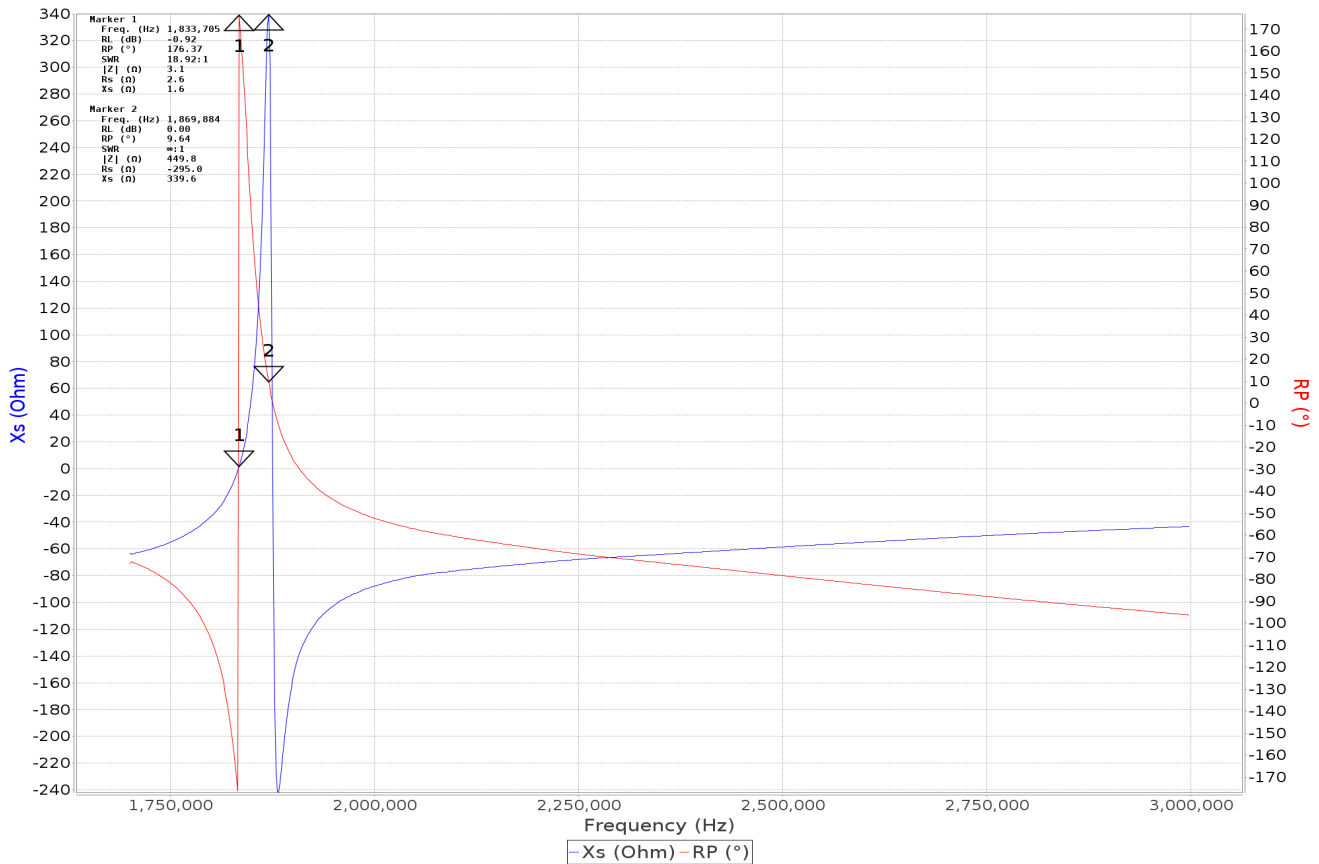

Marker	Freq. (Hz)	RL (dB)	RP (°)	Z  (Ω)	Rs (Ω)	Xs (Ω)	Theta	SWR
1	1,833,705	-0.92	176.37	3.1	2.6	1.6	30.8	18.92:1
2	1,869,884	0.00	9.64	449.8	-295.0	339.6	131.0	:1
1-2	36,179	0.92	166.73	446.7	297.6	338.0	0.0	---

## Comment:

Date: 2/19/19 4:19 PM  
 Mode: Reflection  
 Analyser: miniVNA-pro / VNA - miniVNA pro  
 Scan  
 Start: 1700000 / 1,700,000  
 Stop: 2999298 / 2,999,298  
 Samples: 826  
 Overscan: 1  
 Calibration  
 Samples: 28000  
 Overscan: 0  
 File: REFL\_miniVNA-pro.cal  
 User: doug  
 Headline: L6tdeep+grid+25pf+Pi  
 Port extension len: <not set>m  
 Port extension vf: <not set>

